

No additional off-site fabrication required. Panels are cut to fit on site and secured using a patented process, saving time and money.


Wind + Water 1 


AL13® Panels are cut-to-fit on site and secured using the system frame components - allowing for on-the-fly changes. AL13® system clips and extrusions work together to create a secure system with built-in moisture management.


AAMA 508 - pressure equalized rainscreen  
ASTM E330 - windload

Fire Safety 2 

AL13® Panels are available in standard polyethylene (PE) or Class A2 fire rated (FR) core - the highest quality fire resistant panels on the market

CAN/ULC-S102   
FR Core: flame spread (0) - smoke development (5)

ASTM E84   
FR Core: flame spread (0) - smoke development (30)

CAN/ULC-S134  FR core only

NFPA 285  FR core only

Finish 3 

The AL13® Panel System is available in 9 standard solid, 5 wood grains and 4 metallic finishes - custom color matching also available.

AAMA 2605 - coating finish standard

 20 year finish warranty


Patented 4 

Years of R&D has allowed AL13® to create an innovative system solution to on-site installation and lead time constraints inherent with other products

Contact 5 

www.al13.com  
info@al13.com  
+1 855 438 2513

All Product Orders  
orders@al13.com

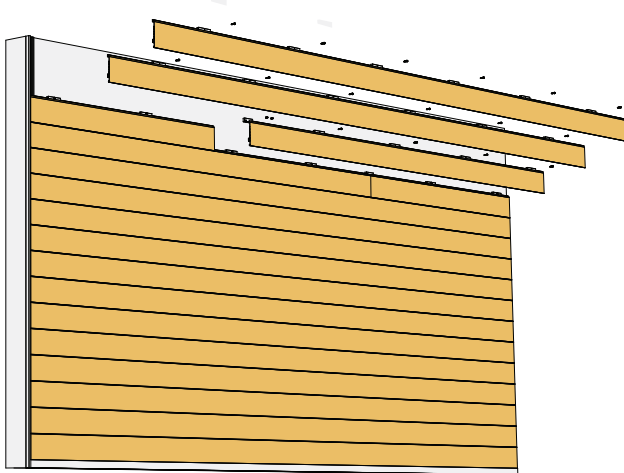

## Get the look of wood, with the durability of metal.

### 0 Beyond Innovation

We went back to the drawing board – we started with a blank sheet of paper with the goal of addressing 3 key features that other lookalikes have missed.

### 1 Improved Moisture Management

New profile behind the plank to increase rain screen functionality

### 2 Better Material Optimization

Improved strength to weight ratio

### 3 Timeless Look / Precision Install

Classic profile design that allows for increased installation precision within 0.5mm (20 thou) for reduced risk of compression resulting from material expansion and contraction across the width of the plank

### Finish



Our system comes in 6 wood grains. Custom color matching also available.

AAMA 2604 - coating finish standard



### Fire Safety



AL13® is made of solid noncombustible aluminum extrusions.

CAN/ULC-S114  non-combustible

ASTM E136  passed

CAN/ULC-S102  flame spread (0)  
- smoke development (0)

ASTM E84  flame spread (0) - smoke development (0)

### Wind + Water



AL13® Planks are cut-to-fit on site, secured using system clips and system frame components - allowing for on-the-fly changes. AL13® system clips and extrusions work together to create a secure system with built-in moisture management.

AAMA 508 - pressure equalized rainscreen



### Contact



www.al13.com  
info@al13.com  
+1 855 438 2513

All Product Orders  
orders@al13.com